


- Ideal for 303.825 MHz Transmitters
- Very Low Series Resistance
- Quartz Stability
- Surface Mount Ceramic Case with 21 mm² Footprint
- Complies with Directive 2002/95/EC (RoHS)
- Tape and Reel Standard per ANSI/EIA-481



RO3104D-1

**303.825 MHz
SAW Resonator**



**SM3838-6 Case
3.8 X 3.8**

The RO3104D-1 is a true one-port, surface-acoustic-wave (SAW) resonator in a surface-mount, ceramic case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at 303.825 MHz. This SAW is designed specifically for AM transmitters in wireless security and remote control applications operating in the USA under FCC Part 15, in Australia, in Japan, and in Korea.

Absolute Maximum Ratings

| Rating | Value | Units |
|--|------------|-------|
| CW RF Power Dissipation (See Typical Test Circuit) | 0 | dBm |
| DC Voltage Between Terminals (Observe ESD Precautions) | 12 | VDC |
| Case Temperature | -40 to +85 | °C |
| Soldering Temperature (10 seconds / 5 cycles max.) | 260 | °C |

| Characteristic | | Sym | Notes | Minimum | Typical | Maximum | Units |
|--|--------------------------------------|-------------------|-------|------------------|----------------|---------|---------------------|
| Frequency (+25 °C) | Nominal Frequency | f _C | | 303.775 | | 303.875 | MHz |
| | Tolerance from 303.825 MHz | Δf _C | | | | ±50 | kHz |
| Insertion Loss | | IL | | | 1.4 | 2.0 | dB |
| Quality Factor | Unloaded Q | Q _U | | | 9500 | | |
| | 50 Ω Loaded Q | Q _L | | | 1400 | | |
| Temperature Stability | Turnover Temperature | T _O | | 10 | 25 | 40 | °C |
| | Turnover Frequency | f _O | | | f _C | | |
| | Frequency Temperature Coefficient | FTC | | | 0.032 | | ppm/°C ² |
| Frequency Aging | Absolute Value during the First Year | f _A | | | 10 | | ppm/yr |
| DC Insulation Resistance between Any Two Terminals | | | | 1.0 | | | MΩ |
| RF Equivalent RLC Model | Motional Resistance | R _M | | | 16.7 | | Ω |
| | Motional Inductance | L _M | | | 82.8 | | μH |
| | Motional Capacitance | C _M | | | 3.3 | | fF |
| | Transducer Static Capacitance | C _O | | | 3.4 | | pF |
| Test Fixture Shunt Inductance | | L _{TEST} | | | 80.4 | | nH |
| Lid Symbolization | | | | 759, YWWS | | | |
| Standard Reel Quantity | Reel Size 7 Inch | | | 500 Pieces/Reel | | | |
| | Reel Size 13 Inch | | | 3000 Pieces/Reel | | | |



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.

Electrical Connections

The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.

| Pin | Connection |
|-----|------------|
| 1 | NC |
| 2 | Terminal |
| 3 | NC |
| 4 | NC |
| 5 | Terminal |
| 6 | NC |

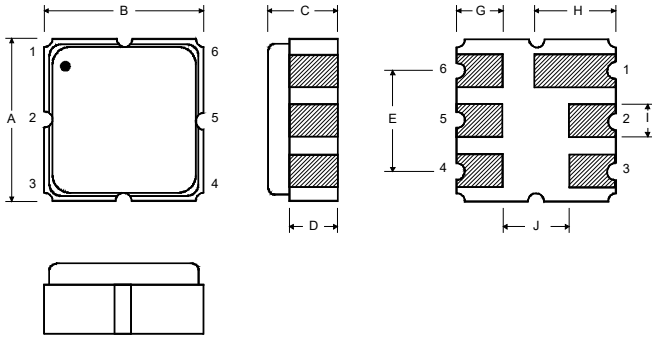


Case Dimensions

| Dimension | mm | | | Inches | | |
|-----------|------|------|------|--------|-------|-------|
| | Min | Nom | Max | Min | Nom | Max |
| A | 3.60 | 3.80 | 4.0 | 0.14 | 0.15 | 0.16 |
| B | 3.60 | 3.80 | 4.0 | 0.14 | 0.15 | 0.16 |
| C | 1.00 | 1.20 | 1.40 | 0.04 | 0.05 | 0.055 |
| D | 0.95 | 1.10 | 1.25 | 0.033 | 0.043 | 0.05 |
| E | 2.39 | 2.54 | 2.69 | 0.090 | 0.10 | 0.110 |
| G | 0.90 | 1.0 | 1.10 | 0.035 | 0.04 | 0.043 |
| H | 1.90 | 2.0 | 2.10 | 0.75 | 0.08 | 0.83 |
| I | 0.50 | 0.6 | 0.70 | 0.020 | 0.024 | 0.028 |
| J | 1.70 | 1.8 | 1.90 | 0.067 | 0.07 | 0.075 |


Typical Test Circuit

The test circuit inductor, L_{TEST} , is tuned to resonate with the static capacitance, C_O , at F_C .



Electrical Test

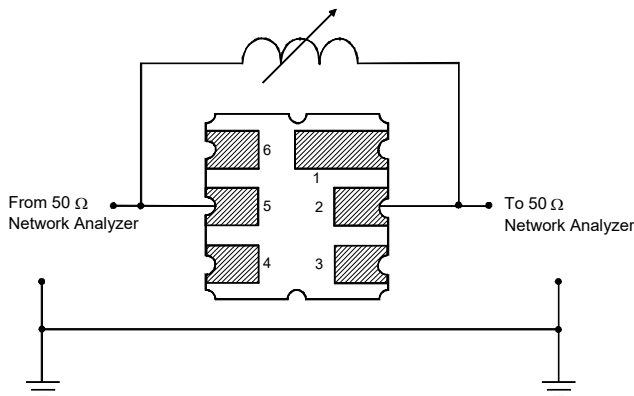


Power Test

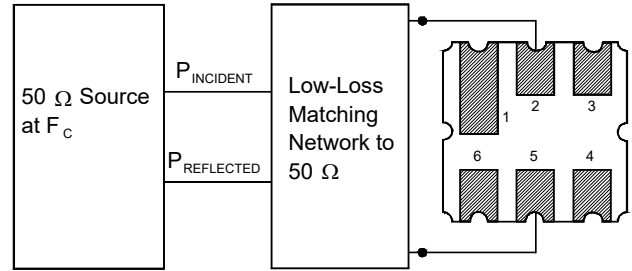

Typical Application Circuits

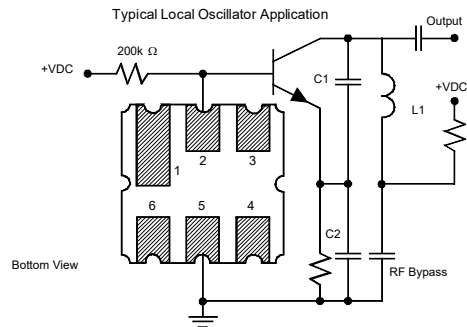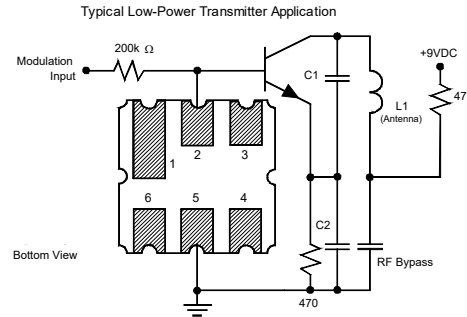


Equivalent LC Model

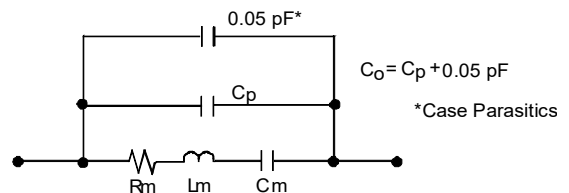

Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.

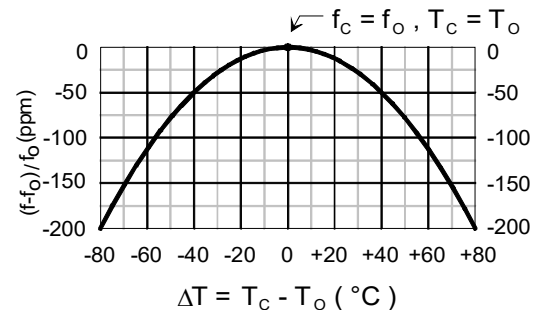

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

